

Sandwich-pressure regulator

OPERATIONAL BENEFITS

1. Easy mounting: saves on installation costs in comparison with inline regulators.
2. Compact all included units.
3. Large orifice provides high flow.
4. Various functions available.
5. Simple, reliable and solid design.
6. Single pressure regulator.



PR37A
PR42B
PR46A
PR47A
PR48B

PR92C

HOW TO ORDER


REGULATORS FOR "PLUG-IN" AND "NON PLUG-IN" VALVES

Gauge	For plug-in valves	For non plug-in valves
Gauge port (plugged)	PR46A-AAAA	PR46A-BAAA

PR93A

OPTIONS

Pressure range :

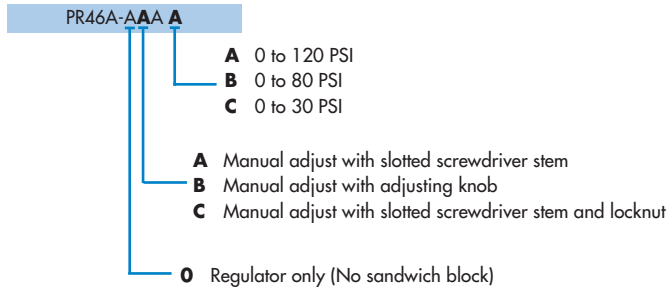

PRA01A
PRA02A
PRA1A

PRP1A

PRA2D

PRP2B

PRA3C

PRP3B

Notes : gages must be ordered separately, not included with regulator.
Recommended gage : 24165-150 (15 mm)

TECHNICAL DATA

Fluid :	Compressed air, inert gases
Pressure range :	0 to 120 PSI
Regulating range :	0 to 120 PSI
Lubrication :	Not required, if used select a medium aniline point lubricant (between 180°F and 210°F)
Filtration :	40 μ
Temperature range :	0°F to 120°F (-18°C to +50°C)
Flow :	Cv 0,21

DIMENSIONS

Dimensions shown are metric (mm)

