


LBV No Diaphragm for Liquid Applications

MAC Valves Series Liquid Bullet Valve®

- Good for passing contamination
- Excellent dosing capabilities
- Virtually zero dead space
- 2 way NC or NO
- Liquids or gases
- Variety of metals
- Variety of rubber
- 1.75 mm, 2.25 mm and other bore sizes options
- Accurate, precise & repeatable

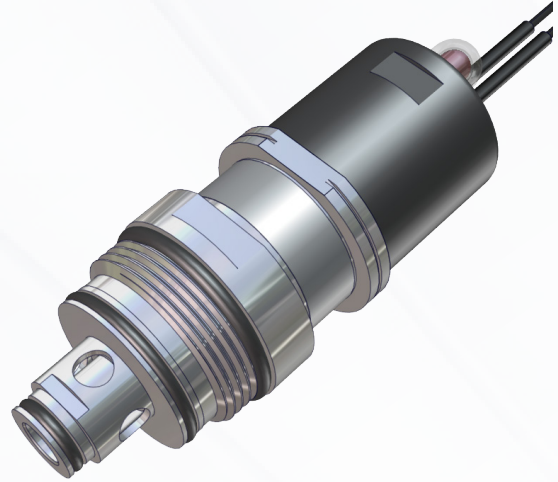

TECHNICAL DATA

Bore Size (mm)	1.75 Dia.	2.25 Dia.
Pressure range (psi)	0-50	0-40
Wattage (W)	1.8-16	1.8-16
Liquid flow (G/min)	Up to 0.65	Up to 0.65

YOUTUBE



OPERATIONAL BENEFITS

- ✓ Extreme repeatability from cycle to cycle
- ✓ Leak tight performance
- ✓ Fast response times
- ✓ High resistance to contamination
- ✓ Low friction design
- ✓ Axial flow
- ✓ Compact size for better integration
- ✓ Drop-in solution
- ✓ Adaptable for different fluids
- ✓ Different body materials available
- ✓ Optional food grade modifications

APPLICATIONS / MEDIA

- ✓ Spray Dampening - water
- ✓ Food & Beverage - water
- ✓ Medical - microdosing
- ✓ Medical - liquid/gas

MAC Valves - Highly engineered solutions for the highest performing applications since 1948



MAC Valves Inc, Wixom, Michigan - MAC Valves Inc, Dundee, Michigan
MAC Valves Europe Inc, Liège, Belgium - MAC Valves Asia Inc, Taiwan

To find your local distributor, visit www.macvalves.com

